


AMENDMENT TO BOLT CENTRES

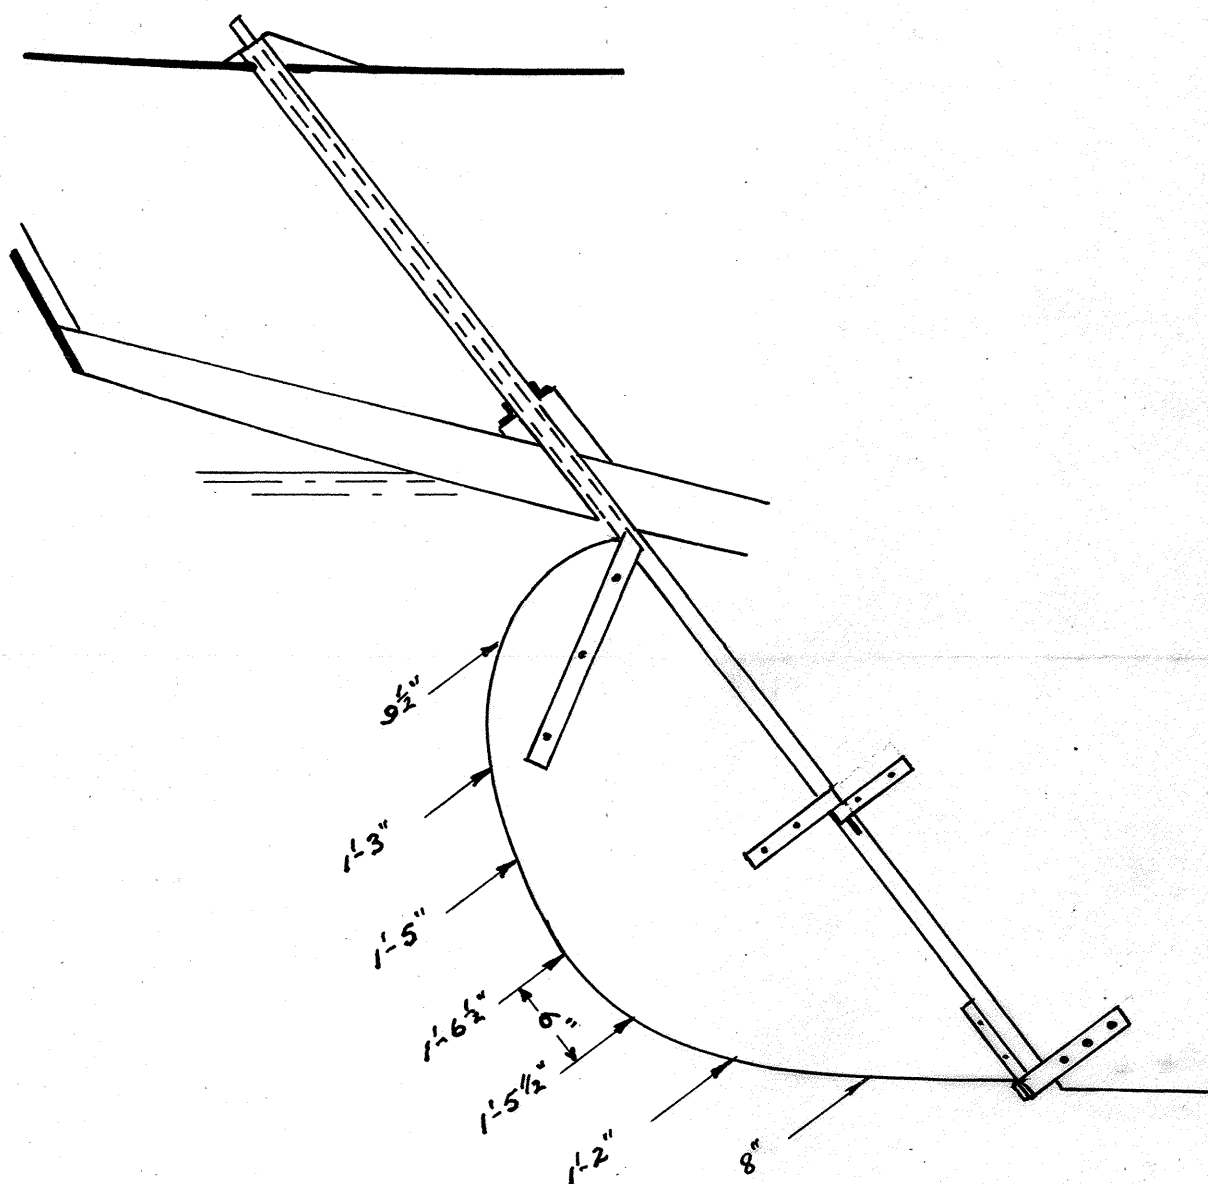

1. Rudder modification where the 'Vire' Engine or a propeller of similar size is used and fitted as a centreline installation.
2. Mainsail to be reduced by 1'-6" along the foot, luff unaltered. Boom reduced in length by 1'-0"
3. Fore hatch to be moved aft on to forward end of coach roof, to provide better access.
4. Tiller to be lengthened by 7"
5. Crosstrees to be lowered 2'-6" for improved stressing.
6. Footwell to be narrowed by 3" each side to improve quarter berth width below.
7. Settee berths to be lowered 2" to allow for the use of foam mattress without reducing headroom.

Y.M. GOOSANDER

AMENDMENTS

SEPT. 1972.

C.J. Daggetta